



匯統國際股份有限公司
Huey Tung International Co.,

產品規格書 Specification

[Model : HT-01180 / 2012.12.18 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.

Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書


SPEAKER SPECIFICATION

型號 Model Number: HT-01180 (1200268)

项 目 Items		规 格 Specification	
1	公称阻抗 Nominal Impedance	4Ω±15%	
2	最低共振周波数 Lowest Resonance Frequency	1400 Hz±20%Hz Without a baffle	
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB	
4	出力音压 Output Sound Pressure Level	87dB±3dB 1W/1M at (8K,10K,12K,14K)Hz AVE.	
5	入力 Input	定格入力 Rated input 15 W	最大入力 Maximum input 30 W
6	磁束密度 Flux Density	-----±10% GAUSS	
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 5.47 V	
8	动作试验电压 Operation Test	Must be normal at program source	
9	极性 Polarity	/	
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:26*6 N35 Sub Magnet:	/G
11	连续负荷试验 Life Test	Din45573 noise 15 W 96 hours	After the Test, Speaker should be meet the Outside and item 7,8
12	耐热试验 Heat Resistance	70℃±2℃ 30%-35%RH 8Hours and then room temperature 1 hours	
13	耐湿试验 Humidity Resistance	40℃±2℃ 90%-95%RH 8Hours and then room temperature 1 hours	
14	耐寒试验 Cold Resistance	/	
15	落下试验 Drop Test	1M 75°±2°	
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上	
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing	
18	失真率 Distortion	/	
19	各部 材质	Cone Paper	Transparent silk
		Voice Coil	/
		Cap	/
20	总重量 Total Weight	/	
 Size: 1.1” 試作發行: 2012.9.18		Approve: Arthur	Check: Chen
		Design: LIU	

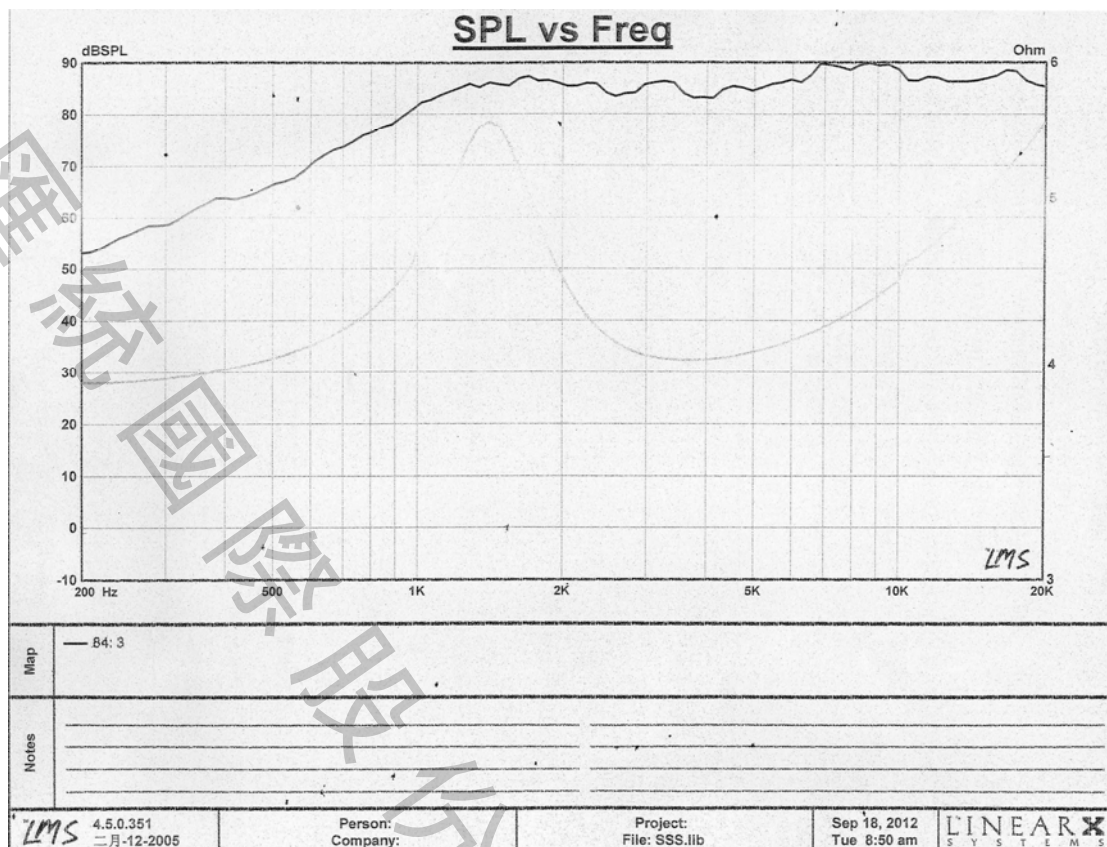

成品圖及照片 Mechanical Dimensions :HT-01180 (1200268)

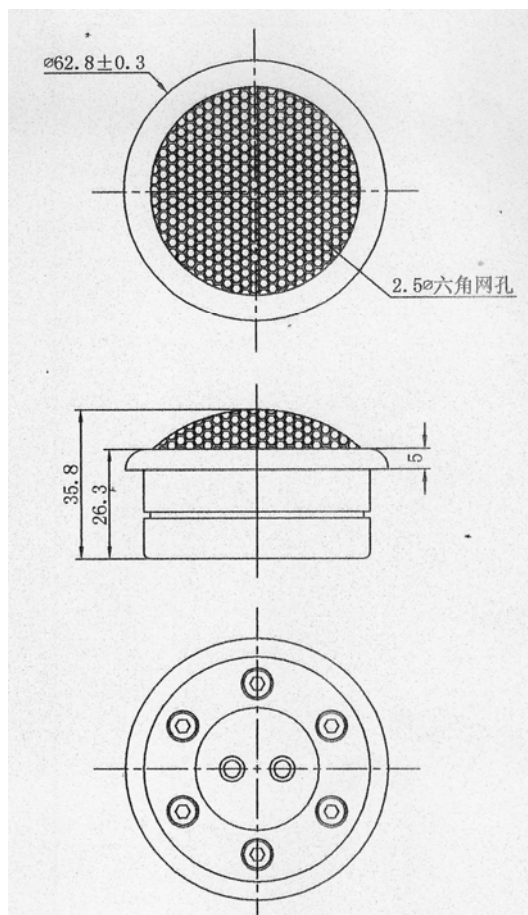

Tolerance: ± 0.5

Unit: mm