



匯統國際股份有限公司

Huey Tung International Co., Ltd.

產品規格書

Specification

[Model : HT-3282 / 2012.11.15 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.

Tel: 886-7-310 5786 / Fax: 886-7-310 0783



E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>



揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-3282

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	3.4Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	110 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~15KHz -10dB		
4	出力音压 Output Sound Pressure Level	82dB±3dB 1W/M at 400, 600, 800, 1KHz, AVE.		
5	入力 Input	定格入力 Rated input 3W	最大入力 Maximum input 5 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 3.5 V		
8	动作试验电压 Operation Test	Must be normal at program source 4.5V		
9	极性 Polarity	/		
10	磁石尺寸/重量 Magnet Dimension/Weight	Magnet:45*19*8 Sub Magnet:	/G	
11	连续负荷试验 Life Test	After test meet item 6,7	PINKDIN45573 3W 96HOURS	
12	耐热试验 Heat Resistance	After test meet item 6,7	55±2° C 節 20-25% R.H 8HOURS	
13	耐湿试验 Humidity Resistance	After test meet item 6,7	40±2° C 節 90-95% R.H 8HOURS	
14	耐寒试验 Cold Resistance	/		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	/		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Cone Paper	黑色泡邊+紙	
		Voice Coil	/	
		Cap	/	
20	总重量 Total Weight	157±2.0g		
	Size: 3"	Approve:	Check:	Design:
	試作發行: 2012.10.31	Arthur	John	LIU

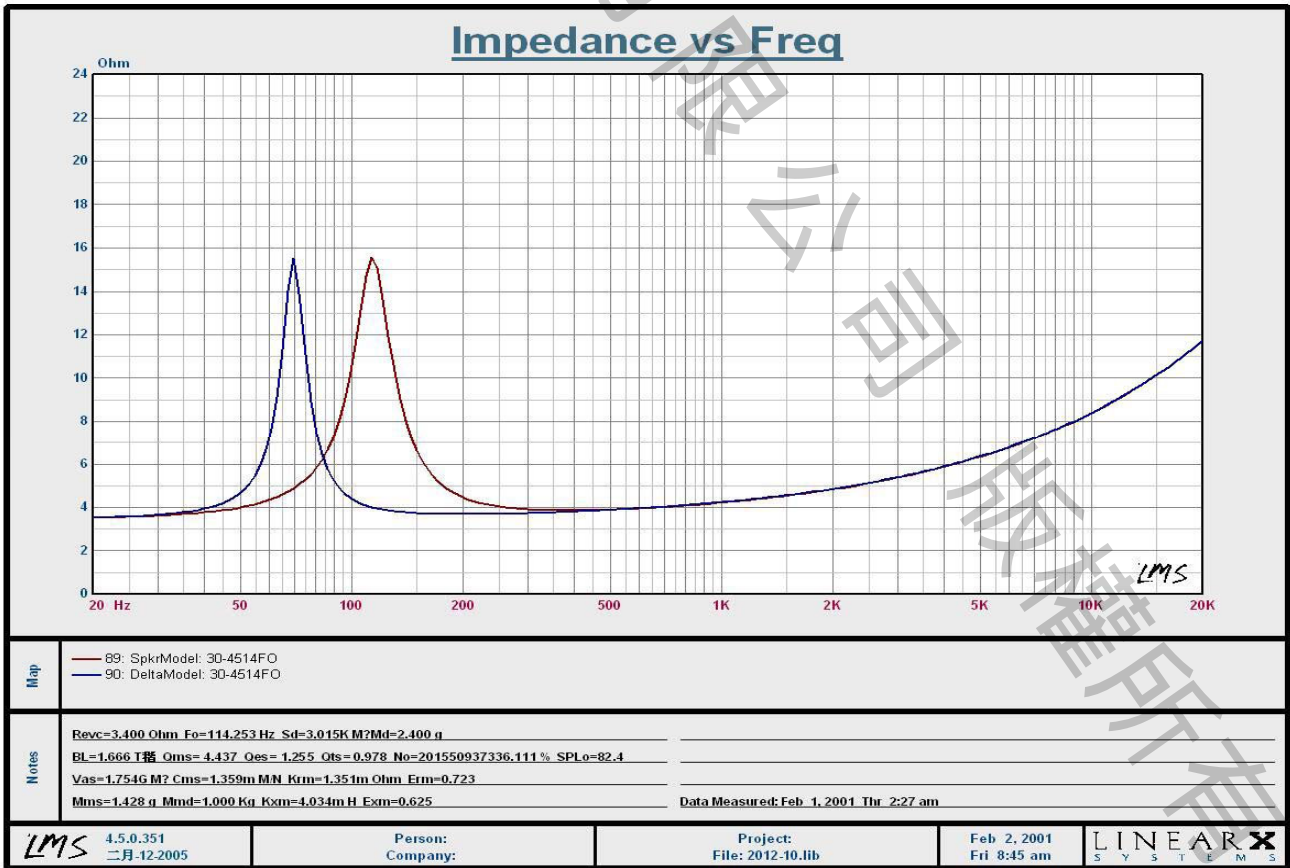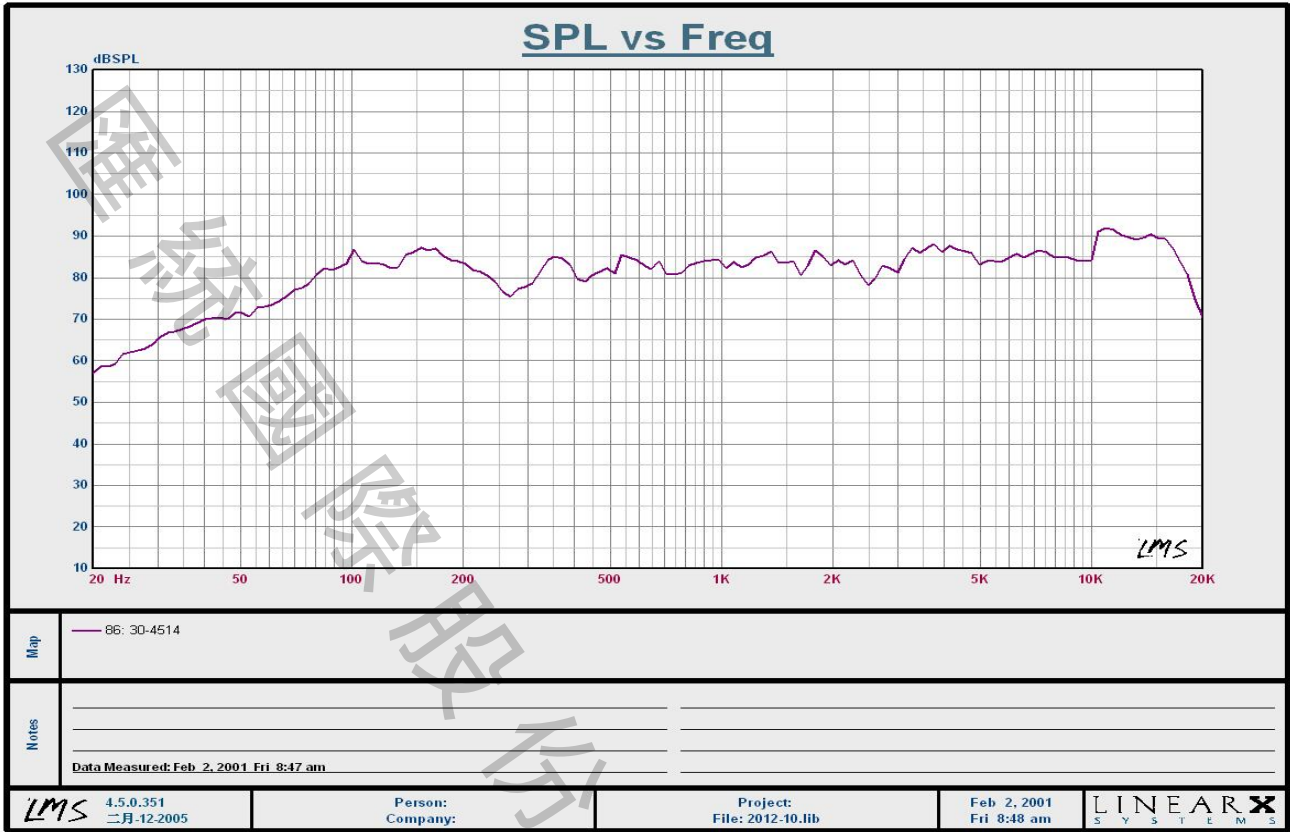

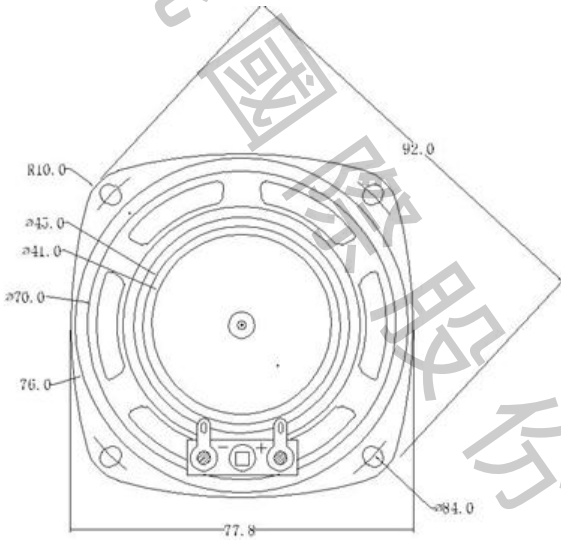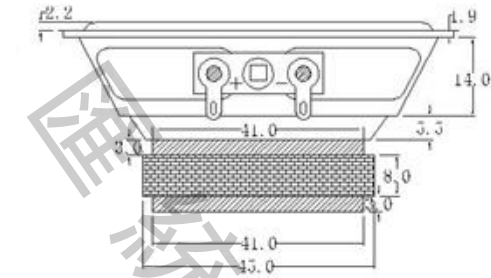

Tolerance: ± 0.5

Unit:mm