

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-3318/ 2017.11.27 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783

E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>


揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-3318

項目 Items		規格 Specification			
1	公称阻抗 Nominal Impedance	4Ω± 15% at 300 Hz 1.0V			
2	最低共振周波数 Lowest Resonance Frequency	1000Hz±20%Hz Without a baffle			
3	实效周波数带域 Effective Frequency Range	FO-18KHz - 10dB			
4	出力音压 Output Sound Pressure Level	85dB±3dB 1M/1W at(300,400,500,600) Hz AVE.			
5	入力 Input	定格入力 Rated input 10 W	最大入力 Maximum input 15 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 6.3 V			
8	动作试验电压 Operation Test	Must be normal at program source			
9	极性 Polarity	/			
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 55*25*10 Y25 Sub Magnet:	G		
11	连续负荷试验 Life Test	After the Test, Speaker should be meet the Outside and item 7,8			
12	耐热试验 Heat Resistance				
13	耐湿试验 Humidity Resistance			21°C± 70%	
14	耐寒试验 Cold Resistance				
15	落下试验 Drop Test	1M 75°±2°			
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上			
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing			
18	失真率 Distortion				
19	各部 材质	Cone Paper	Paper cone + Paper Edge		
		Voice Coil	Φ 13		
		Cap			
20	总重量 Total Weight	/			
		Size: 98mm 試作發行: 2017.11.27	Approve: Arthur	Check: John	Design: WANG

音波曲線 Frequency: HT-3318

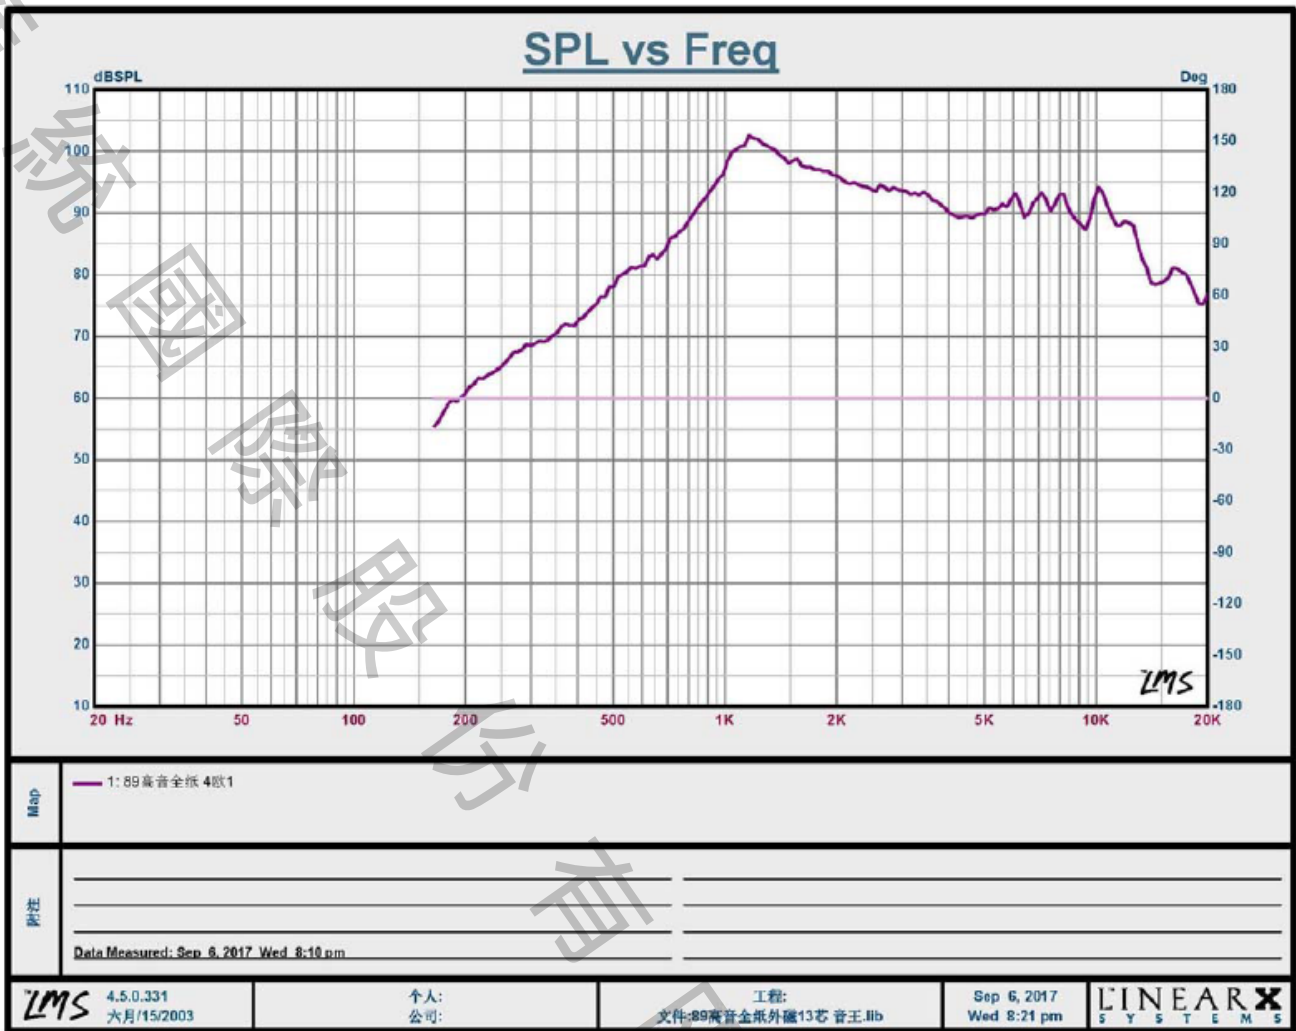

成品圖及照片 Mechanical Dimensions : HT-3318



Height	Diagonal installation	Frame diameter
36 mm	88 mm	98 mm

Tolerance:0.5

Unit:mm