

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-6397/ 2017.10.03 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783




E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-6397

項目 Items		規格 Specification			
1	公称阻抗 Nominal Impedance	4Ω± 10%			
2	最低共振周波数 Lowest Resonance Frequency	78 Hz±20%Hz Without a baffle			
3	实效周波数带域 Effective Frequency Range	FO-11KHz			
4	出力音压 Output Sound Pressure Level	85dB±3dB			
5	入力 Input	定格入力 Rated input 50 W	最大入力 Maximum input 100 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 13 V			
8	动作试验电压 Operation Test	Must be normal at program source V			
9	极性 Polarity	/			
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 90*50*15 Sub Magnet:	G		
11	连续负荷试验 Life Test	60 W 12Hours	After the Test, Speaker should be meet the Outside and item 7,8		
12	耐热试验 Heat Resistance	70°C±2°C 20%-25%RH Hours and then room temperature 1 hours			
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH Hours and then room temperature 1 hours			
14	耐寒试验 Cold Resistance				
15	落下试验 Drop Test	1M 75°±2°			
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上			
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing			
18	失真率 Distortion	5% Less than			
19	各部 材质	Cone Paper	Paper cone + Rubber edge		
		Voice Coil	Φ 25 KSV		
		Cap	pp		
20	总重量 Total Weight	/			
		Size: 165mm 試作發行: 2017.10.03	Approve: Arthur	Check: John	Design: WANG

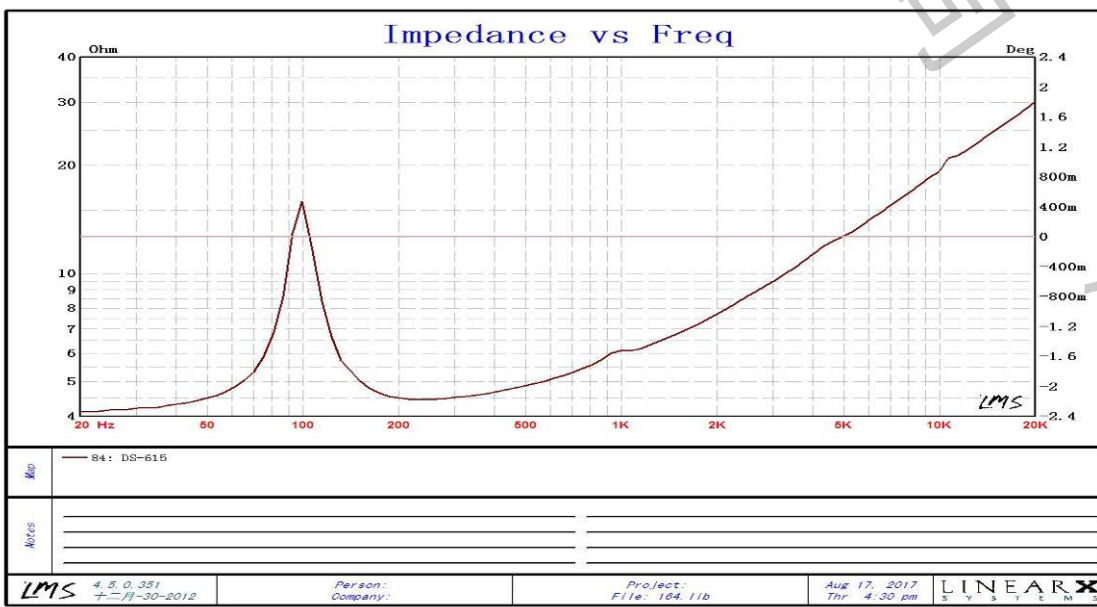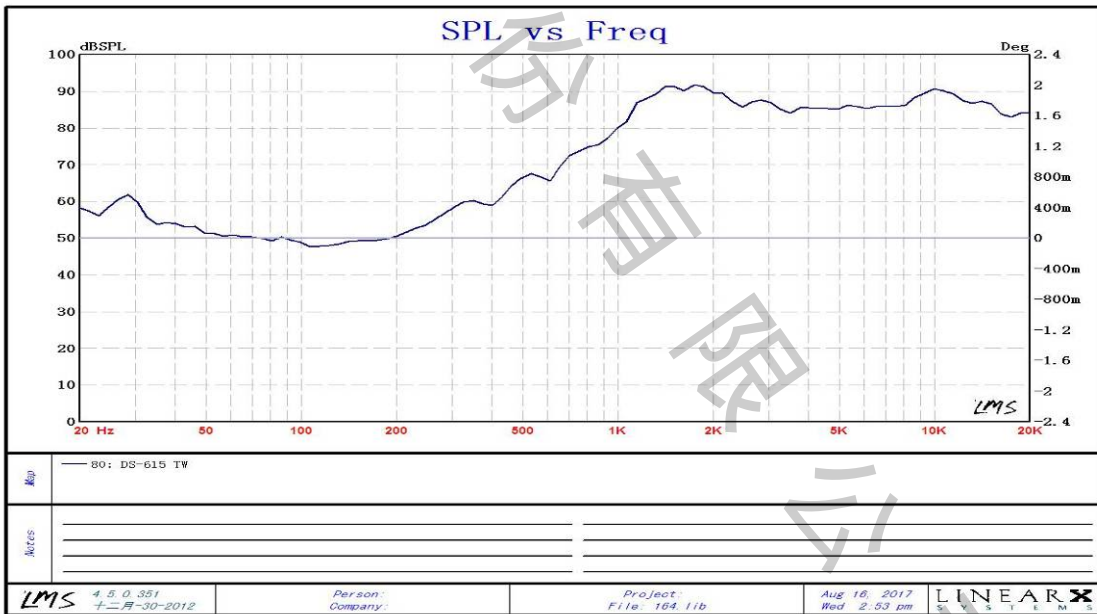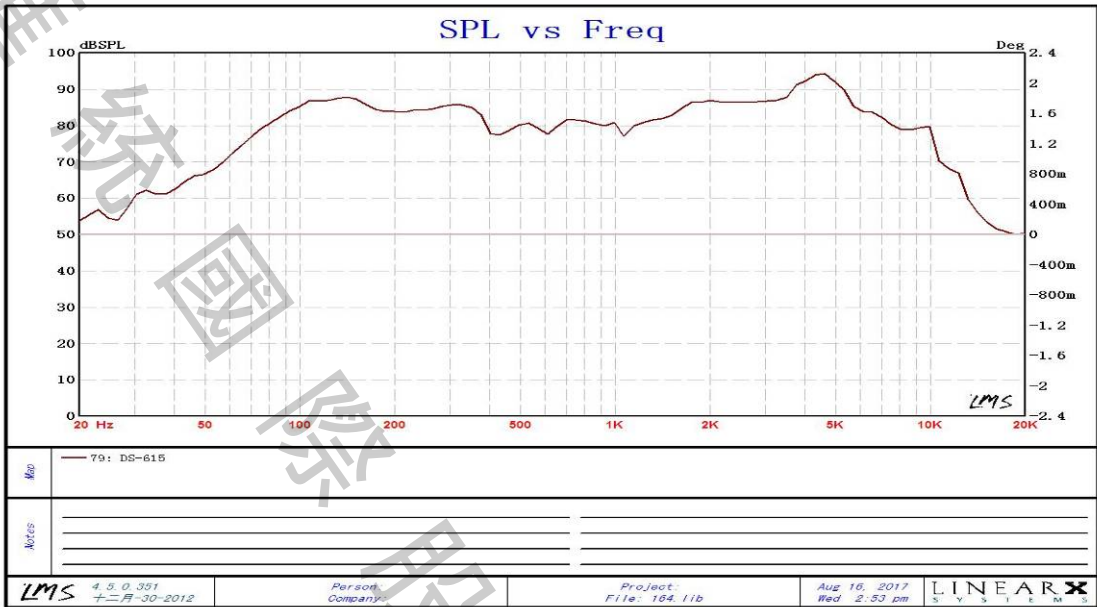



Height	Diagonal installation	Frame diameter
68 mm	156 mm	165 mm

Tolerance:0.5

Unit:mm