



匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-NS2840B10U4-350 / 2015.06.01 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783



E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>


揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-NS2840B10U4-350

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω±15% at 1.2K Hz 1.0v		
2	最低共振周波数 Lowest Resonance Frequency	180 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	83dB±3dB 1W/0.5M at (600,800,1K,1.2K)Hz AVE.		
5	入力 Input	定格入力 Rated input 2 W	最大入力 Maximum input 4 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 2 V		
8	动作试验电压 Operation Test	Must be normal at program source		
9	极性 Polarity	A		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:18.5*4 N35 Sub Magnet:	8.0 G	
11	连续负荷试验 Life Test	IEC-268-5 2 W 96 hours		
12	耐热试验 Heat Resistance	70°C±2°C 30%-35%RH 8Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance			
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Diaphragm	PEI + PU Edge	
		Voice Coil	19Φ* 4Ω KSV+CCAW 反向 180°	
		Cap		
20	总重量 Total Weight	47g		
	Size: 19Φ	Approve:	Check:	Design:
	試作發行: 2015. 06. 01	Arthur	John	LIU

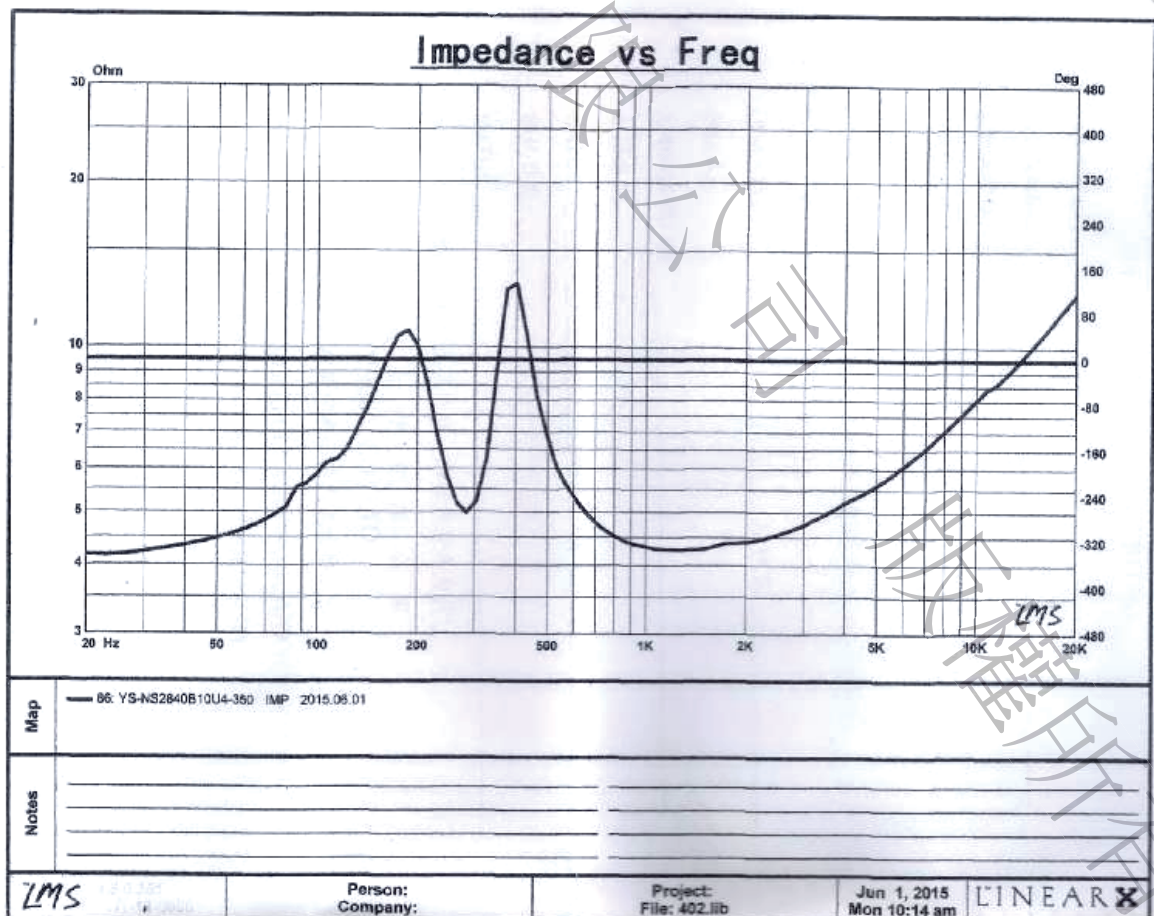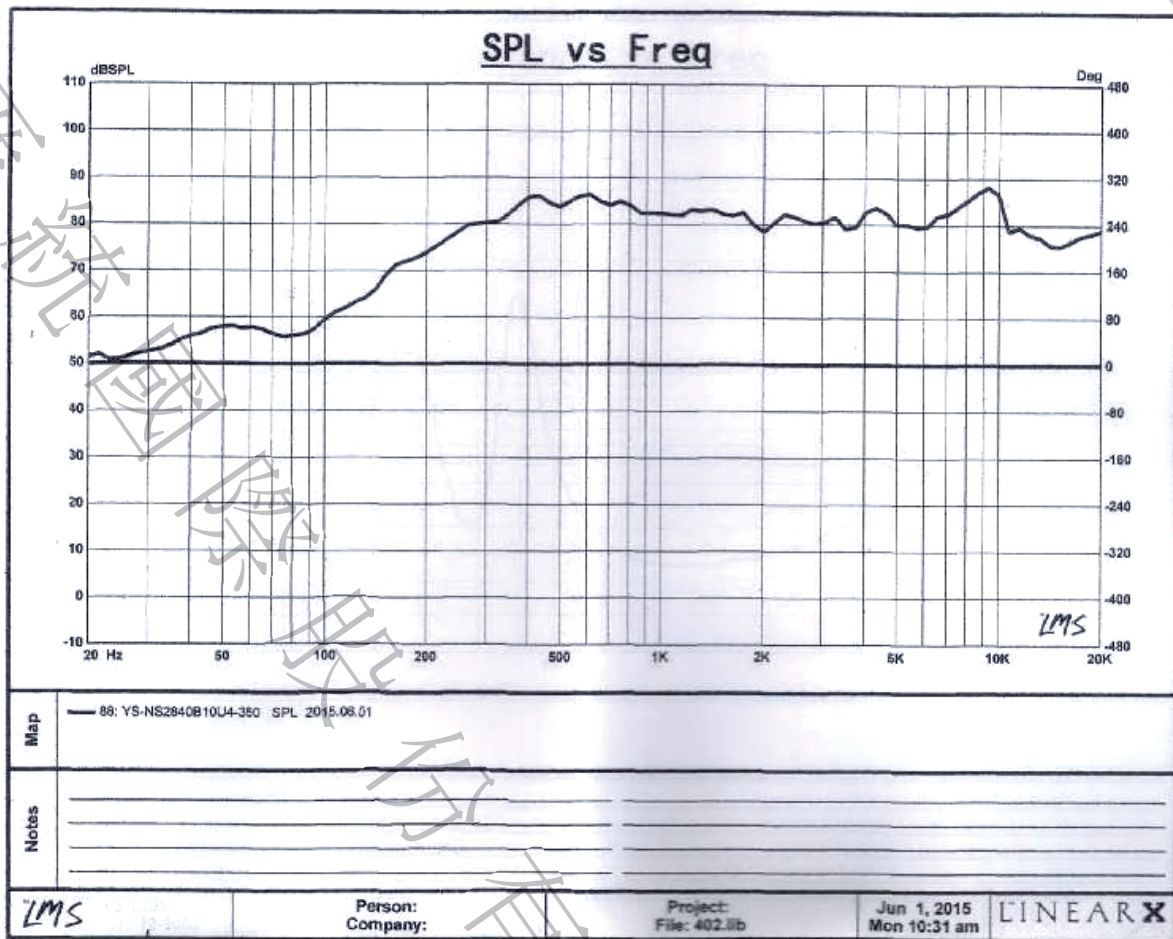

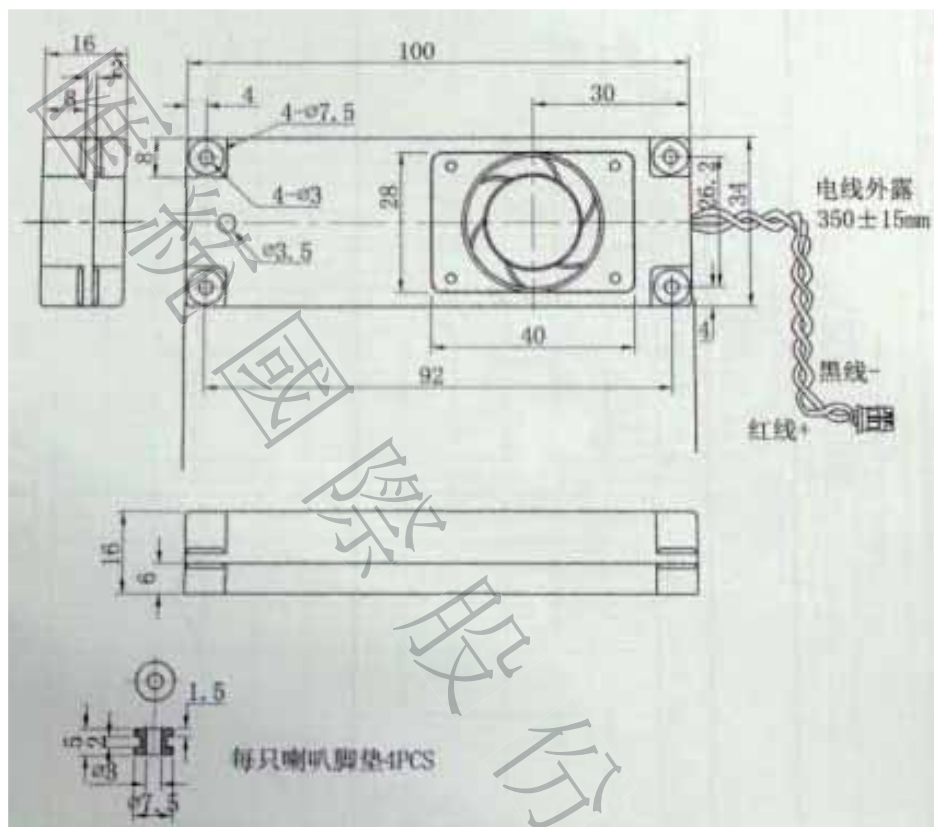

Tolerance:0.5

Unit: mm

