



匯統國際股份有限公司

Huey Tung International Co., Ltd.

# 產品規格書

# Specification

[ Model : HT-4051 / 2013.1.18 version ]



**Cara Audio Corporation**

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783

E-mail: [carawang@hueytung.com.tw](mailto:carawang@hueytung.com.tw) / <http://www.hueytung.com.tw>


# 揚聲器製品規格書

## SPEAKER SPECIFICATION


**型號 Model Number:** HT-4051 (1200084)

項目 Items		規格 Specification			
1	公称阻抗 Nominal Impedance	4Ω±15% at 5.5K Hz 1.0v			
2	最低共振周波数 Lowest Resonance Frequency	3200 Hz±20%Hz Without a baffle			
3	实效周波数带域 Effective Frequency Range	F0~15KHz -10dB			
4	出力音压 Output Sound Pressure Level	90dB±3dB 1W/1M at (3K,5K,7K,9K)Hz AVE.			
5	入力 Input	定格入力 Rated input 10 W	最大入力 Maximum input 20 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 6.32 V with 3.3UF 50V			
8	动作试验电压 Operation Test	Must be normal at program source			
9	极性 Polarity	/			
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:12.5*2 N35 Sub Magnet:	/G		
11	连续负荷试验 Life Test	DIN45573 noise 10 W 96 hours with 3.3UF 50V	After the Test, Speaker should be meet the Outside and item 7,8		
12	耐热试验 Heat Resistance	70°C±5°C 30%-35%RH 8Hours and then room temperature 1 hours			
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours			
14	耐寒试验 Cold Resistance				
15	落下试验 Drop Test	1M 75°±2°			
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上			
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing			
18	失真率 Distortion	/			
19	各部 材质	Cone Paper	PEI Dome(钛色)		
		Voice Coil	13ΦX4Ω ASV 剥离 180度		
		Cap	/		
20	总重量 Total Weight	/			
		Size: 41mm 試作發行: 2012.04.07	Approve: Arthur	Check: John	Design: LIU

音波曲線 Frequency: HT-4051 (1200084)

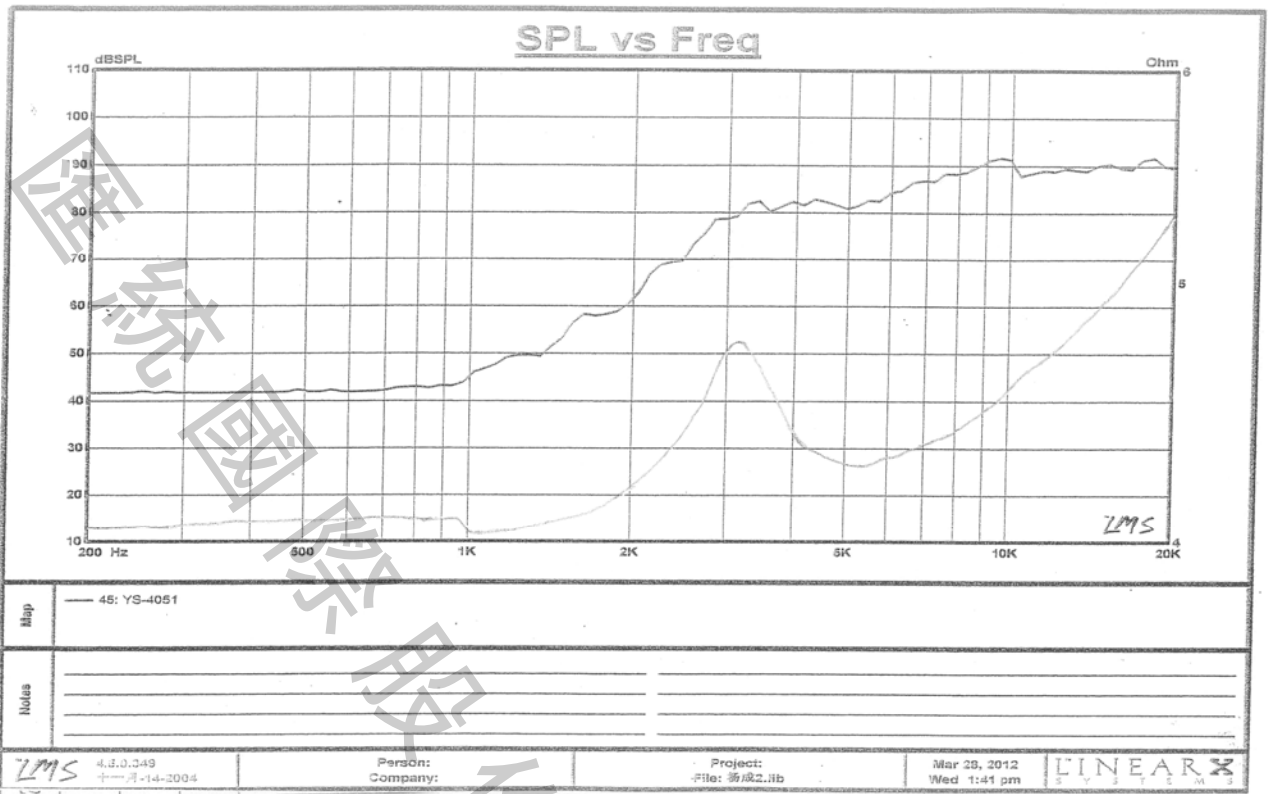

成品圖及照片 Mechanical Dimensions : HT-4051 (1200084)

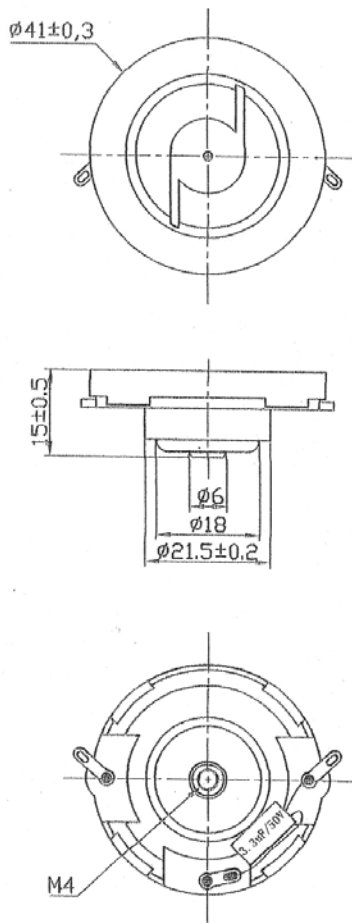

Tolerance:  $\pm 0.5$   
Unit: mm

