

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-6399/ 2017.10.03 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783




E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-6399

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω± 10%		
2	最低共振周波数 Lowest Resonance Frequency	70 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	FO-10KHz		
4	出力音压 Output Sound Pressure Level	85dB± 3dB		
5	入力 Input	定格入力 Rated input 50 W	最大入力 Maximum input 100 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 12 V		
8	动作试验电压 Operation Test	Must be normal at program source V		
9	极性 Polarity	/		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 80*40*12 Sub Magnet: 7.7 Oz	G	
11	连续负荷试验 Life Test	50W 12Hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70 °C±2°C 20%-25%RH Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance			
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	5% Less than		
19	各部 材质	Cone Paper	PP cone + Rubber Edge	
		Voice Coil	Φ 25 KSV	
		Cap	/	
20	总重量 Total Weight	657G		
	Size: 165.5mm	Approve:	Check:	Design:
	試作發行: 2017.10.03	Arthur	John	WANG

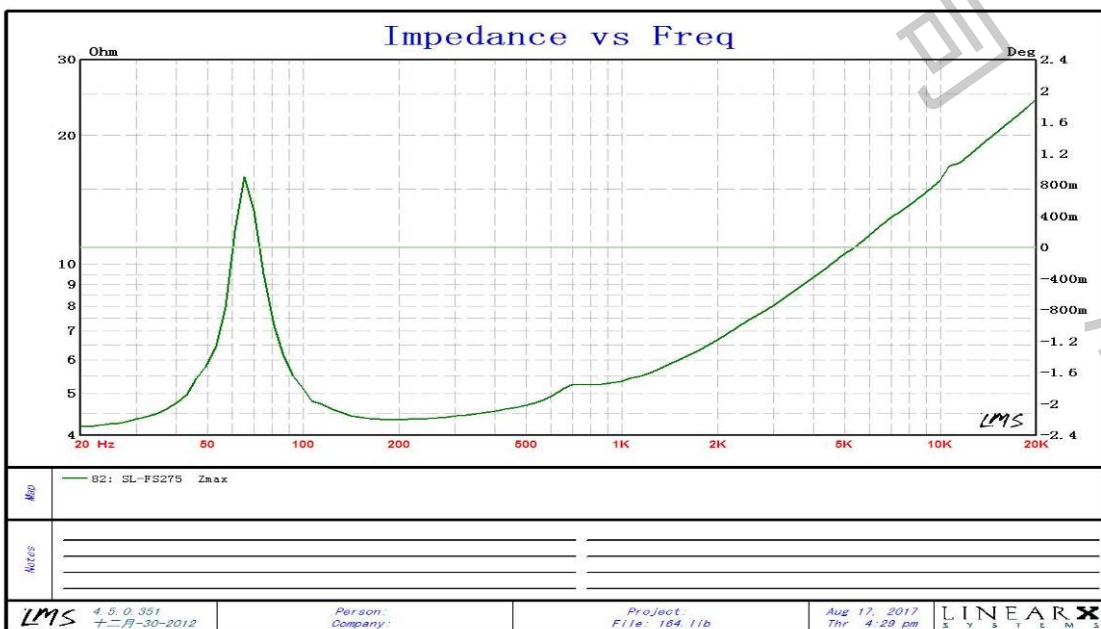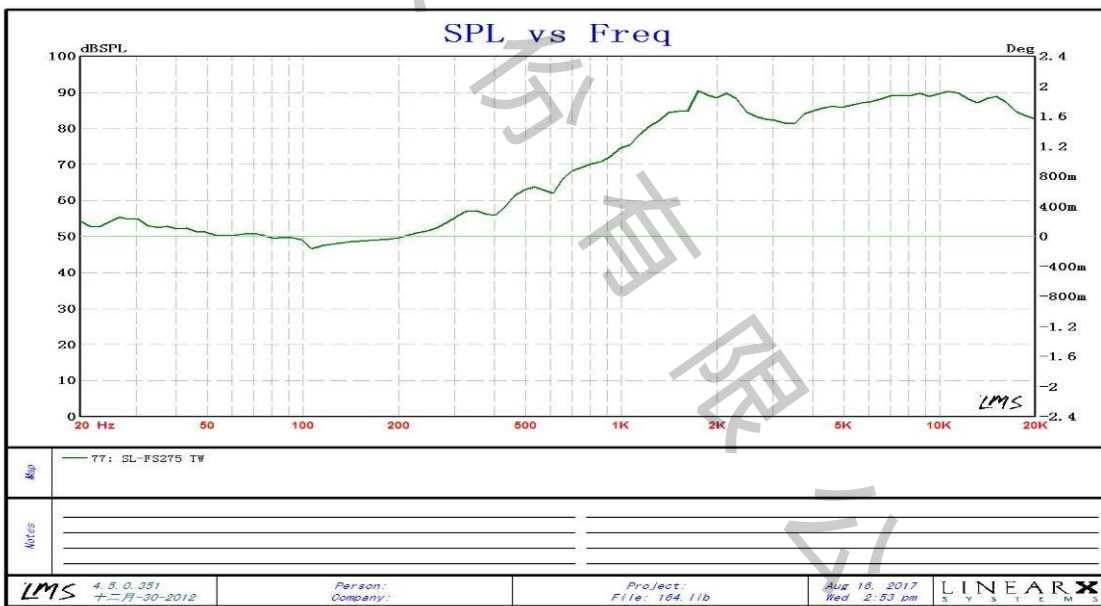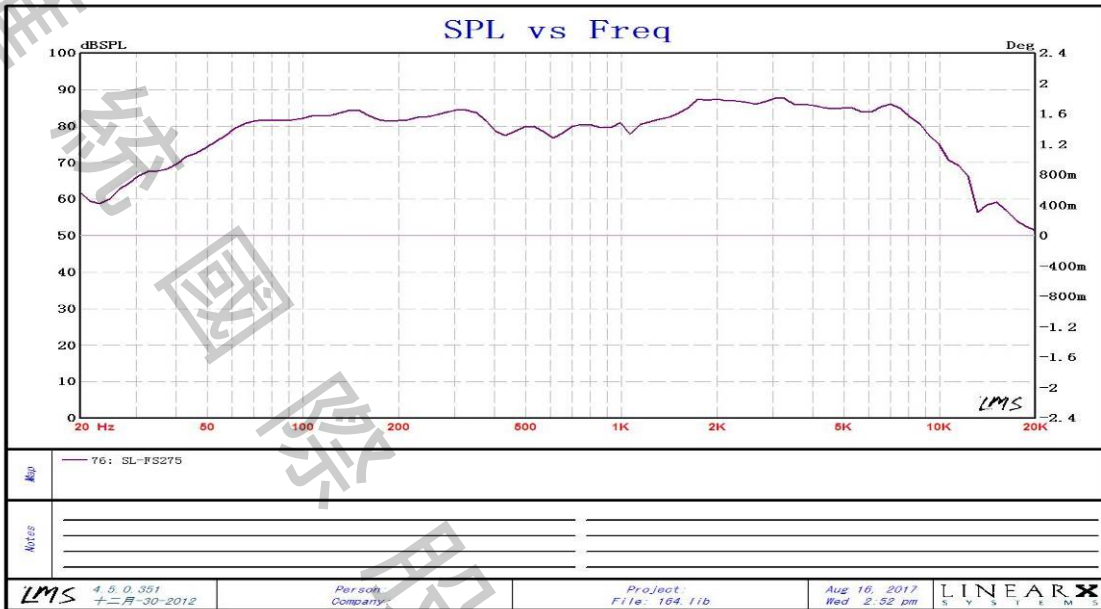



Height	Diagonal installation	Frame diameter
62 mm	156 mm	165.5 mm

Tolerance:0.5

Unit:mm